


SIGN	DATE	DESCRIPTION	APPROVER
△			
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!			

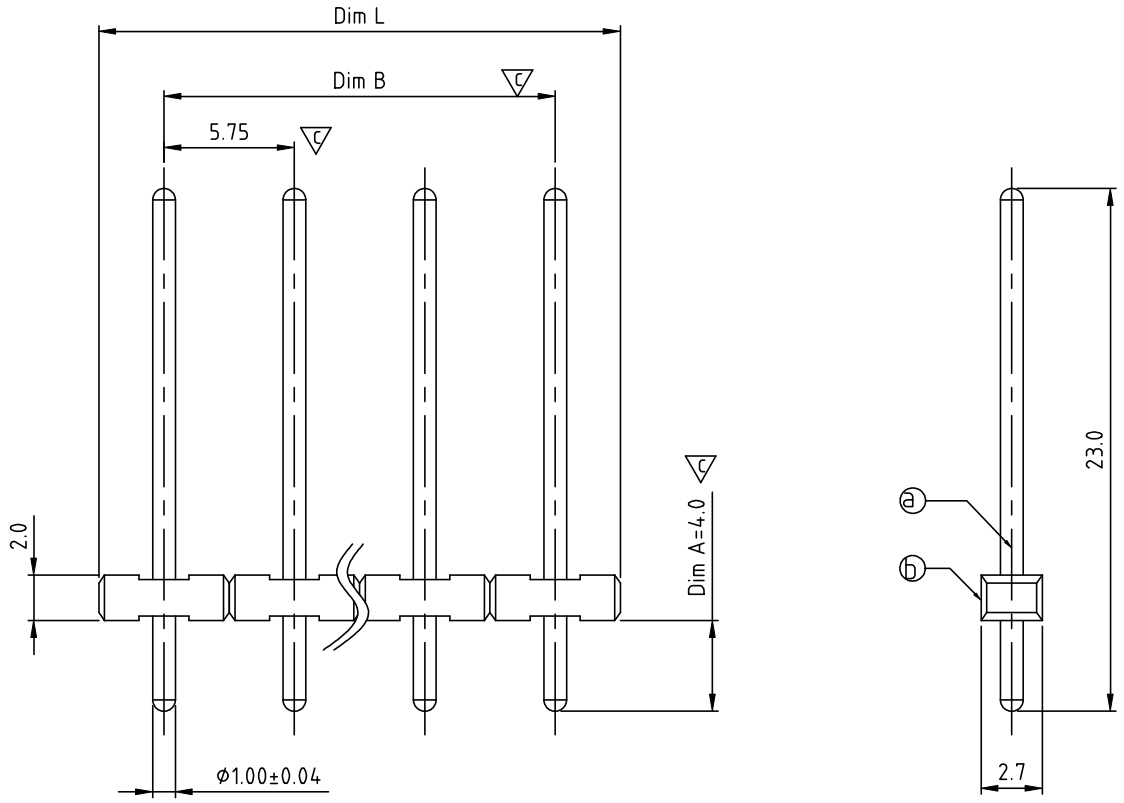

Material

- Contact Solder pin : Brass(CuZn) ,Bright Tin plated over Nickel plated
- Insulator (housing) : Thermoplastic (UL94V-0)

Electrical


- Voltage rating: 300V
- Current rating: 10A
- Withstanding Voltage: 1.6KV
- Operating temperature: -40°C to +115°C
- Soldering temperature: 260°C±5°C/5 Sec
- Safety Approval:
- Critical dimension: ▽

N = Number of poles

Dim L=Nx5.75

Dim B=(N-1)x5.75

PART NO.	Tolerance
OP028Q000003G	±0.10

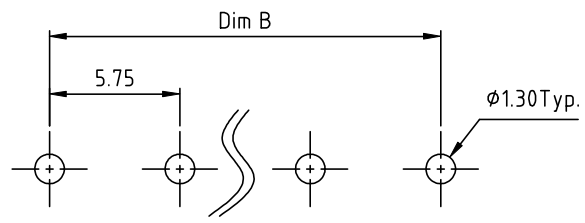

P.C.B. LAYOUT

Amphenol
ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATSOEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE		OP 5.75 Series Dim A=4.0mm (L=23.0mm,φ1.00) (Pin 尖為圓型)					
PART NO.		DWG NO.			80P0815		
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.		Tolerance	
		CHENMING	CHENMING			X. ±0.50	
		2016.09.23	2016.09.23			UNIT: mm	X.X ±0.30
						SCALE: NONE	X.XX ±0.10
				SHEET: 01/01	REV.: B	X° ±1°	